

## PVC ADHESIVE TAPE



- PVC tape
- Permanent, static dissipative surface
- Low charging
- Colour: yellow with ESD symbol
- Core diameter: 76 mm

Part Nr.	Width	Length
2820.12733.Y	12,7 mm	33 m
2820.25433.Y	25,4 mm	33 m

## POLYIMIDE MASKING TAPE



The Polyimide masking tape has a high heat resistance and is used mainly as masking tape for PCB soldering processes.

- Heat resistance: 230° C
- Very good chemical resistance
- Low charging property
- Backing: insulative
- Core diameter: 76 mm

Part Nr.	Width	Length
2823.1033.HR	10 mm	33 m
2823.2033.HR	20 mm	33 m
2823.2533.HR	25 mm	33 m


## WARNING ADHESIVE TAPE



- Static dissipative Cellophane, transparent
- Low charging
- ESD Symbol
- Used for marking rejected items
- Core diameter: 76 mm

Part Nr.	Width	Length
2820.1966	19 mm	66 m
2820.4866	48 mm	66 m

## ADHESIVE GRID TAPE

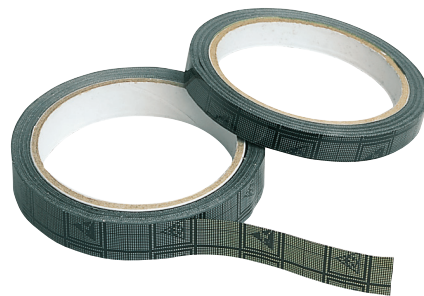

- Material: Polypropylene
- Low charging
- ESD Symbol
- Core diameter: 76 mm

Part Nr.	Width	Length
2820.3462.12	12 mm	36 m
2820.3462.18	18 mm	36 m
2820.3462.24	24 mm	36 m
2820.3462.48	48 mm	36 m

