

1432.663



1432.665



Profile

- Three-layer material with foamed core
- Top and bottom made of rugged synthetic rubber
- Conductive backing
- Resistant to solder and heat
- Abrasion resistant
- Elastic
- Volume conductive
- Shock-absorbing, e.g. for the handling of sensitive equipment
- Thickness: 3 mm
- Includes 2 x 10 mm snap fastener and




Part Nr.	Colour	Standard Sizes
1432.663.L*	Platinum grey	610 x 1220 mm
1432.663.S*	Platinum grey	610 x 900 mm
1432.663.R		rolls: 1220 mm x 10 m
1432.663.Z		Custom sizes available on request

*rounded edges (radius approx. 43 mm)

Part Nr.	Colour	Standard Sizes
1432.665.L*	Royal blue	610 x 1220 mm
1432.665.S*	Royal blue	610 x 900 mm
1432.665.R		rolls: 1220 mm x 10 m
1432.665.Z		Custom sizes available on request

*rounded edges (radius approx. 43 mm)

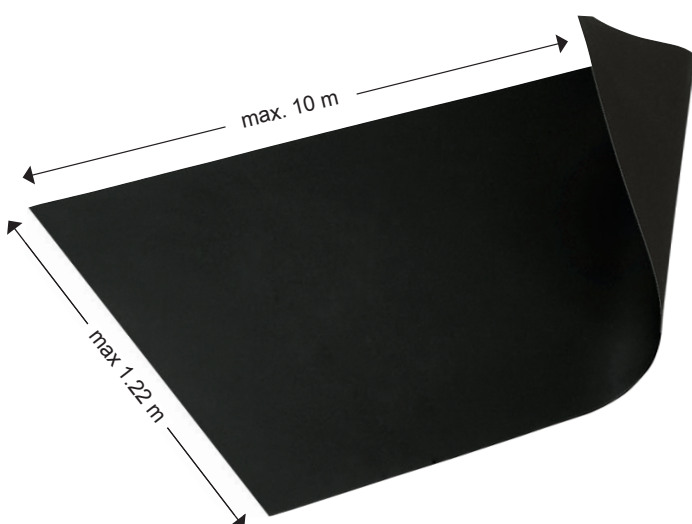

conductive
backing

- Two layer material
- Rugged synthetic rubber
- Resistant to solder and heat
- Abrasion resistant
- Elastic
- Volume conductive
- Thickness: 1,5 mm



Part Nr.	Colour	Standard Sizes
1452.659.R	Black	rolls: 1220 mm x 10 m
1452.659.R61	Black	rolls: 610 mm x 10 m
1452.659.R40	Black	rolls: 400 mm x 10 m
1452.659.Z		Custom sizes available on request

