


BENCHTOPS

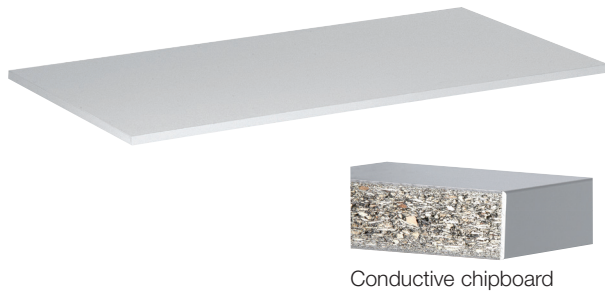

Conductive chipboard


- Replacements benchtops for upgrading existing benches in offices and laboratories
- Hard laminate top side bonded with a conductive glue to a volume conductive chipboard
- Balance hard laminate on the underside
- Available edge: grey ABS
- Standard thickness: 27 mm

Custom sizes and other top side material on request

IEC
EN

Part Nr.	Colour
1920.Z	Light grey

MOBILE SIDE TABLE ON WHEELS

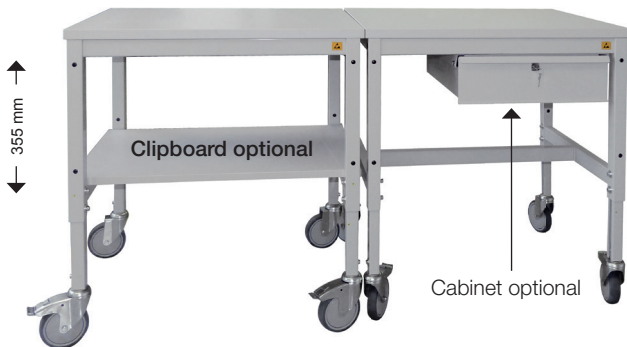

- Metallic support 40 x 40 x 2 mm
- Reinforced metallic construction
- Conductive grey paint finish
- Benchtop made of conductive chipboard and static dissipative hard laminate, 27 mm
- Colour: grey
- 4 Swivel-Casters, 2 with brake

Custom sizes available on request!

IEC
EN

Part Nr.	Standard dimensions (W x D x H)
1950.LC.3941.MOB	800 x 600 x 752 - 952 mm
1950.LC.3941.MOB.ZA	Clipboard optional, 800 x 500 mm, 25 mm, melamine resin coated
1950.LC.3941.MOB.SB	Cabinet

SHELVES




- Shelf unit with 2 or 3 supports, height: 350 mm
- Can be mounted on a benchtop (incl. screws)
- Top side coated with dissipative melamine resin, depth: 300 mm, thickness: 25 mm
- Dissipative powder coating
- Maximum load 60 kg

IEC
EN

Part Nr.	Standard dimensions	supports
1950.LZ.8333	1200 mm length	2
1950.LZ.8334	1250 mm length	3
1950.LZ.8335	1500 mm length	3
1950.LZ.8336	1600 mm length	3
1950.LZ.8337	1750 mm length	3
1950.LZ.8338	2000 mm length	3

ROTARY PLATE

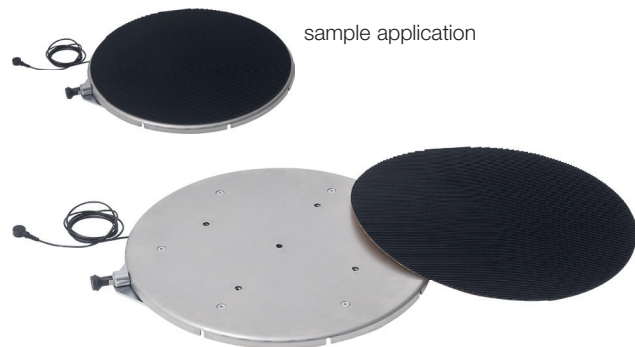

- Rotary Plate suitable as mounting aid
- 365 x 17 mm stainless steel with 4 x M6 standard threaded
- 330 mm Rotating assembly with stainless steel ball
- Arrest 8 x 45°
- Axial load max. 300kg
- Weight 4 kg
- Grounding via grounding cord with 10 mm snap
- Supplied with dissipative black ECOSTAT® anti slip mat which can be glued to metallic surfaces

IEC
EN

Part Nr.	dimensions
1955.DT	Ø 365 mm, Height: 17 mm

