


POINT-TO-POINT PROBE MODEL 860

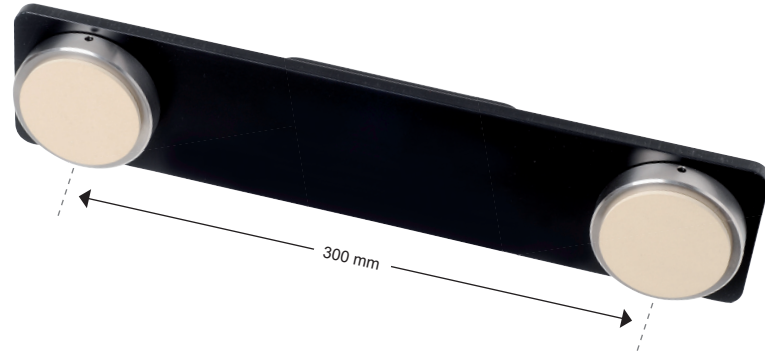

application example: measurement acrylic cover

- For the point to point and resistance to ground measurement at a 30 cm fixed distance between the electrodes
- Must be connected to a high resistance Ohmmeter
- Conductive rubber ($R < 5 \text{ ohm}$) with silver particles
- 950 g weight
- Dimensions: 385 x 85 x 70 mm (L x W x H)
- Contact rubber: $\text{Ø } 63,5 \text{ mm}$
- Incl. calibration certificate
- Insulative handle

Part Nr.

7220.860

Point-to-point probe model 860

BACKREST PROBE



Measurement in walk-in climatic chamber



- For resistance to ground measurements of ESD chairs backrests
- Fitted with conductive rubber with silver particles $R < 5 \text{ ohm}$
- Insulated handle
- Connection: 4 mm banana plug socket
- **Each probe can be contacted separately**

Part Nr.

7220.900

Backrest probe